




World Class Cleaning & Hygiene Solutions®

Alternative Floor Surfaces

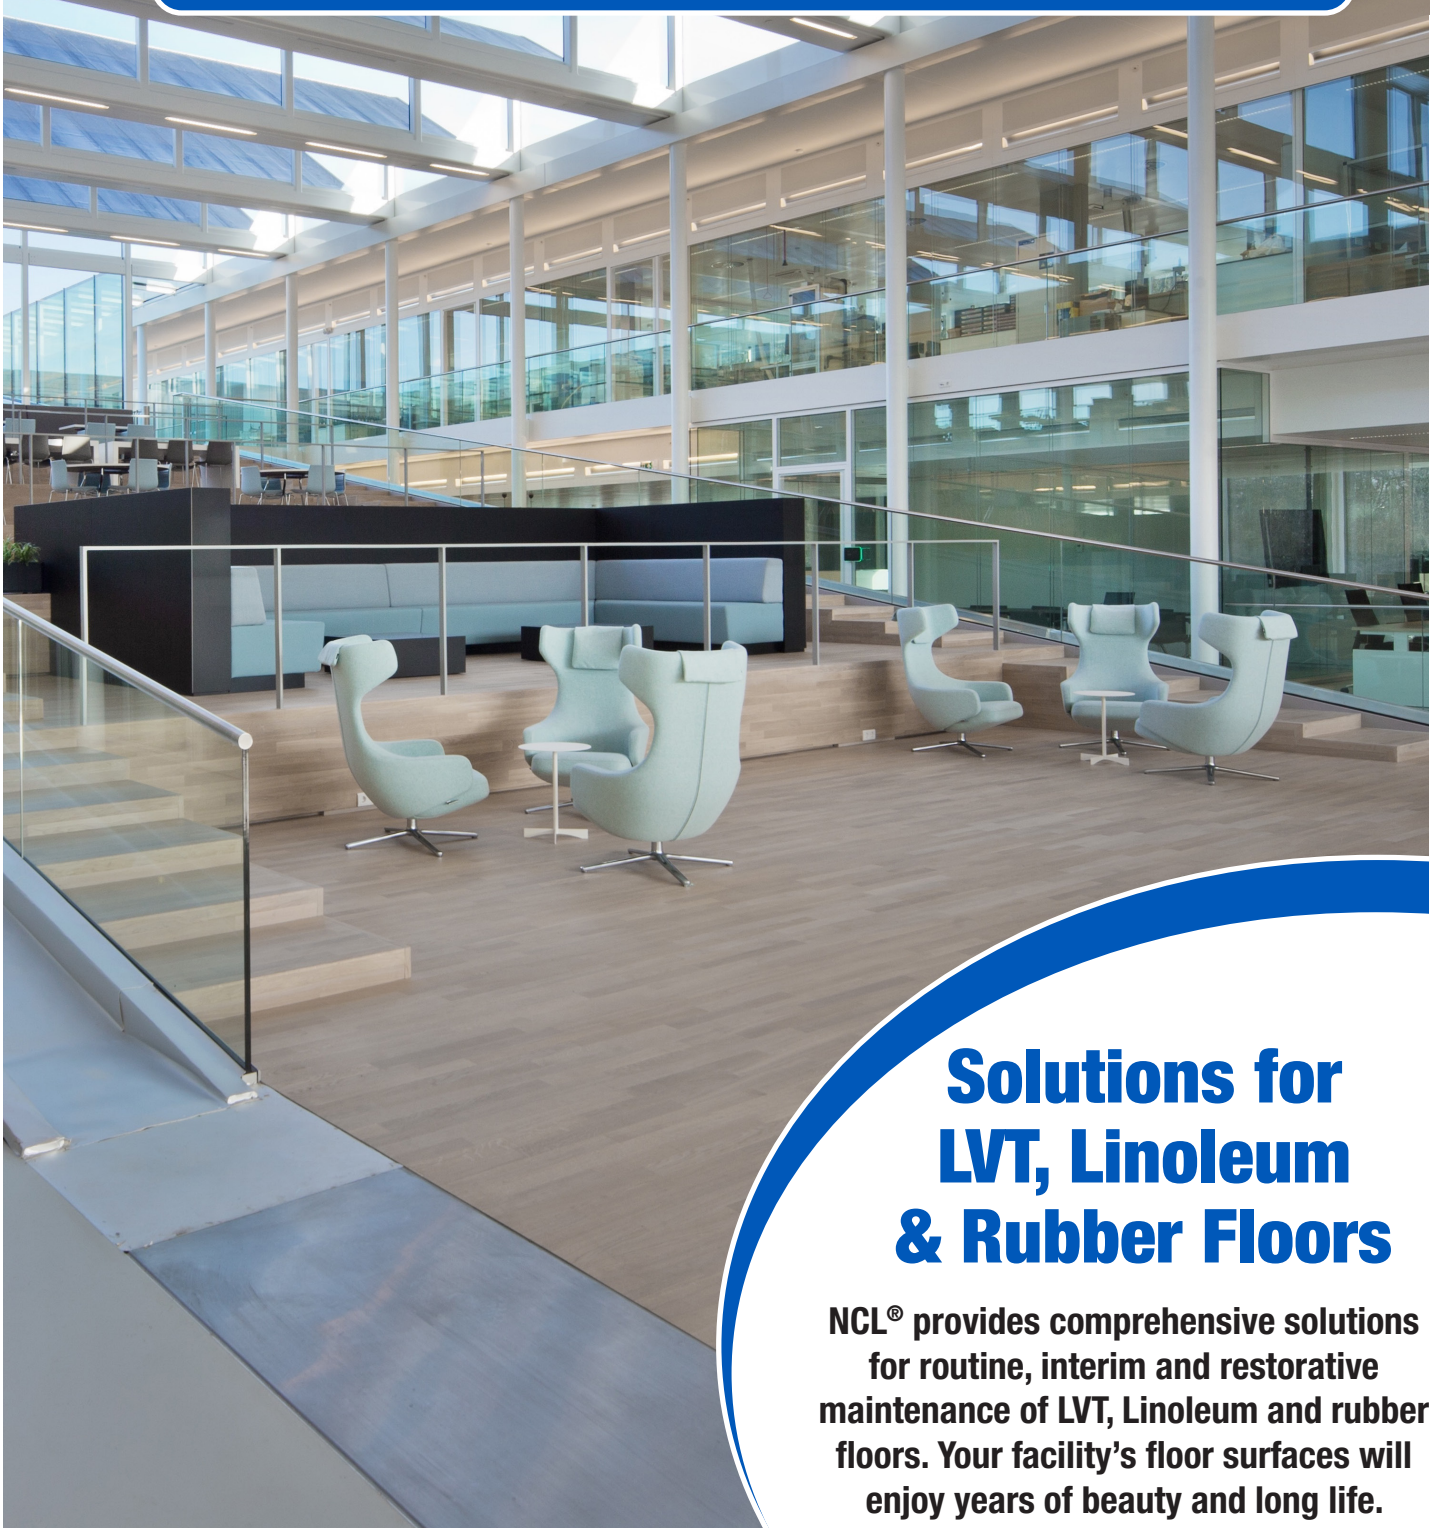

Solutions for LVT, Linoleum & Rubber Floors

NCL® provides comprehensive solutions for routine, interim and restorative maintenance of LVT, Linoleum and rubber floors. Your facility's floor surfaces will enjoy years of beauty and long life.

Every Aspect of Floor Care is Covered!

Cleaners

LVT-Clean™

Routine Luxury Vinyl Tile Cleaner (#2620)

An advanced pH neutral “ultra-wetting” formula for routine, safe, cleaning of luxury vinyl tile (LVT), linoleum, no-wax flooring and synthetic floors. This unique “ultra-wetting” formula quickly penetrates dirt, soils, etc on the floor surface, surrounding the soil right down to the surface and leaving the floor cleaner, brighter, more alive.

Packaging	Weight	Cube	Units per Case (Layers / Total)
4 x 1 Gal./Case	37 lbs.	1.13	12/60

Enhance™

Neutral Floor Cleaner (#0935)

An alkaline-free cleaner designed for maintaining wet-look gloss floor finishes. Low to moderate foaming, this balanced detergent formula emulsifies soils for easy film free cleaning. May be used through an automatic scrubber. Fresh lemon fragrance provides a pleasant scent.

Packaging	Weight	Cube	Units per Case (Layers / Total)
55 Gal. Drum;	500 lbs	11.00	1/4
5 Gal. Pail;	45 lbs	1.04	12/36
4 x 1 Gal./Case	37 lbs.	1.13	12/60

Flexi-Clean™

Intensive Rubber Cleaner and Grease Remover (#2610)

An advanced formula for safe cleaning of flat rubber and studded rubber flooring. Removes grease and heavy soil without harmful solvents or caustics. Ideal for use on industrial floors and many other environments. May be used manually or with an automatic scrubber.

Packaging	Weight	Cube	Units per Case (Layers / Total)
4 x 1 Gal./Case	37 lbs.	1.13	12/60

Restorers

Surface Prep™

LVT / Linoleum Deep Scrub Cleaner (#2621)

Surface Prep™ is a water-based cleaning concentrate designed for aggressively removing embedded soils and scuffs in upper layers of alternative floor surfaces such as LVT, Linoleum and Rubber. With a neutral range pH formulation, minimal rinsing is required to save time and labor. Surface Prep™ is ideal for preparing a surface for the application of approved coatings to protect and highlight floors.

Packaging	Weight	Cube	Units per Case (Layers / Total)
4 x 1 Gal./Case	37 lbs.	1.13	12/60

Coatings

Next Century™

LVT / Linoleum High Gloss Floor Coating (#2623)

This advanced product creates a protective barrier that adds a gloss shine to reveal the true character, color and beauty of the floor. This water-resistant coating improves slip resistance and improves the cleaning ability on the surface. NEXT CENTURY™ is recommended for use on any LVT, Linoleum or Rubber floor. Use it on new flooring to protect and enhance the original beauty and look. Use it on worn flooring to restore and revitalize the look of the surface.

Packaging	Weight	Cube	Units per Case (Layers / Total)
4 x 1 Gal./Case	37 lbs.	1.13	12/60

Flexi-Sheen™

Rubber Wax and Conditioner (#2612)

Use FLEXI-SHEEN™ Rubber Wax and Conditioner to clean, condition and protect and beautify flat rubber and studded rubber floors in one easy step. An exceptional blend of waxes, detergents, polymers and gloss enhancers. With FLEXI-SHEEN™, the floor surface is cleaned while a water resistant coating remains to improve slip resistance.

Packaging	Weight	Cube	Units per Case (Layers / Total)
4 x 1 Gal./Case	37 lbs.	1.13	12/60

LVT-Protect™

Luxury Vinyl Tile Enhancer (#2622)


Use LVT-PROTECT™ Luxury Vinyl Tile Enhancer to provide a maintainable “wear layer” to improve cleaning efficiency, protect your LVT investment and should be part of a complete LVT maintenance program. LVT-PROTECT™ Luxury Vinyl Tile Enhancer creates a clear, protective barrier that adds a low, satin shine to reveal the true character, color and beauty of the original product.

Packaging	Weight	Cube	Units per Case (Layers / Total)
4 x 1 Gal./Case	37 lbs.	1.13	12/60



A Floor Program for Your Needs

NCL has developed step by step programs to assure your floors are properly cared for. With products designed for LVT, Linoleum and Rubber, look no further than NCL.

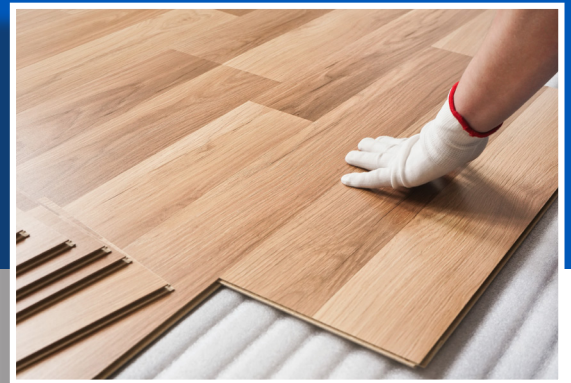

LVT

Clean

Routine Damp Mopping:

Dilute NCL LVT-CLEAN™ solution according to the label directions. Use cold water only. Wring the damp mop out tightly. Damp mop, rinsing the wet mop frequently. Allow to dry thoroughly. No rinsing is required.

For Use with Automatic Scrubber:

Dilute NCL LVT-CLEAN™ solution according to the label directions. Use appropriate floor maintenance pad. Apply product with pad or brushes on, vacuum on and squeegee in the down position. Mop up any remaining solution from floor with mop and bucket. Allow to dry thoroughly.

Protect

Matte Coating: LVT-Protect™

Using a wet mop or microfiber applicator, apply LVT-PROTECT™ at a rate of 1000 sq. ft. per gallon. Allow to dry thoroughly. Worn, dull, lifeless LVT may require more than one application. Repeat as desired, being sure to allow adequate time for drying between each coat.

Gloss Coating: Next Century™

Using a wet mop or microfiber applicator, apply NEXT CENTURY™ at a rate of 2500 sq. ft. per gallon. Allow to dry thoroughly. Worn, dull, lifeless LVT may require more than one application. Repeat as desired, being sure to allow adequate time for drying between each coat. Allow to dry for a minimum of 20 minutes after each coat. Do not apply more than 4 coats in a 24 hour period. Floor should be thoroughly dry before traffic is allowed in area.

Restore

Scrub/Re-coat Using Standard 175 RPM Floor Machine:

Dilute SURFACE PREP™ in a mop bucket at a dilution ratio of 1:6 to 1:10, depending upon build-up. Liberally mop solution onto floor surface and allow to dwell for 1 to 4 minutes (depending on how aggressive it is desired to scrub). For additional directions refer to SURFACE PREP™ product label.

Scrub/Re-coat Using Automatic Scrubber:

Dilute SURFACE PREP™ in mop bucket at a dilution ratio of 1:6 to 1:10, depending upon build-up. Liberally mop solution onto floor surface and allow to dwell for 1 to 4 minutes (depending on how aggressive it is desired to scrub). For additional directions for automatic scrubbing refer to SURFACE PREP™ product label.

Linoleum

Clean

Mopping:

Fill the mop bucket with ENHANCE™ solution diluted according to the chart. Apply solution to the floor liberally with a mop and allow to stand for 3 to 5 minutes. Agitate as needed to loosen soils. Remove solution from floor with mop and bucket or wet-dry vacuum. Allow floor to dry thoroughly.

Automatic Scrubbing:

Fill the automatic scrubber with ENHANCE™ solution diluted according to the chart. Mount scrub brushes or red scrub pads on drive block.

One Pass Method: With the solution valve open, brushes or red pads down and rotating at medium pressure, squeegee down and vacuum on, scrub the floor and pick up solution in one pass. Pick up any trails or puddles using a clean mop and clean water. Allow floor to dry thoroughly.

Protect

Gloss Coating: Next Century™

Using a wet mop or microfiber applicator, apply NEXT CENTURY™ at a rate of 2500 sq. ft. per gallon. Allow to dry thoroughly. Worn, dull, lifeless LVT may require more than one application. Repeat as desired, being sure to allow adequate time for drying between each coat. Allow to dry for a minimum of 20 minutes after each coat. Do not apply more than 4 coats in a 24 hour period. Floor should be thoroughly dry before traffic is allowed in area.

Restore

Scrub/Re-coat Using Standard 175 RPM Floor Machine:

Dilute SURFACE PREP™ in a mop bucket at a dilution ratio of 1:6 to 1:10, depending upon build-up. Liberally mop solution onto floor surface and allow to dwell for 1 to 4 minutes (depending on how aggressive it is desired to scrub). For additional directions refer to SURFACE PREP™ product label.

Scrub/Re-coat Using Automatic Scrubber:

Dilute SURFACE PREP™ in mop bucket at a dilution ratio of 1:6 to 1:10, depending upon build-up. Liberally mop solution onto floor surface and allow to dwell for 1 to 4 minutes (depending on how aggressive it is desired to scrub). For additional directions for automatic scrubbing refer to SURFACE PREP™ product label.

Rubber

Clean	Protect	Restore
<p>Mop & Bucket Application: Dilute FLEXI-CLEAN according to label instructions. Mop diluted solution onto floor; allow solution to dwell on surface for 5-10 minutes. Agitate solution as required with mop, or with floor machine and pad. Remove solution from floor with mop and bucket or wet vacuum.</p> <p>Automatic Scrubber Application: Dilute FLEXI-CLEAN in solution tank according to label instructions. Apply product with the vacuum off and squeegee in the up position; allow solution to dwell on surface for 5-10 minutes. With vacuum on and squeegee in the down position, agitate the floor surface and remove solution from floor with automatic scrubber.</p>	<p>Routine/Daily Cleaning: FLEXI-SHEEN™ can be used on a daily, on an as-needed basis, quarterly, or semi-annually as traffic dictates. Dust mop floor with an approved dust mop treatment to remove all dry soil and loose debris prior to cleaning. Dilute 2-8 oz. of FLEXI-SHEEN™ per gallon of warm water into mop bucket or automatic scrubber. For additional directions refer to FLEXI-SHEEN™ product label.</p> <p>Initial/Restoration Cleaning or After Degreasing: Dust Mop floor with dust mop treatment to remove all dry soil and loose debris prior to cleaning. Do not dilute FLEXI-SHEEN™ prior to using. Pour undiluted FLEXI-SHEEN™ into mop bucket. Apply FLEXI-SHEEN™ using a wet mop or a flat mopping system. Apply as you would a floor finish (approximately 2,500 - 3,000 square ft. per gallon coverage). For additional directions refer to FLEXI-SHEEN™ product label.</p>	<p>Scrub/Re-coat Using Standard 175 RPM Floor Machine: Dilute SURFACE PREP™ in a mop bucket at a dilution ratio of 1:6 to 1:10, depending upon build-up. Liberally mop solution onto floor surface and allow to dwell for 1 to 4 minutes (depending on how aggressive it is desired to scrub). For additional directions refer to SURFACE PREP™ product label.</p> <p>Scrub/Re-coat Using Automatic Scrubber: Dilute SURFACE PREP™ in mop bucket at a dilution ratio of 1:6 to 1:10, depending upon build-up. Liberally mop solution onto floor surface and allow to dwell for 1 to 4 minutes (depending on how aggressive it is desired to scrub). For additional directions for automatic scrubbing refer to SURFACE PREP™ product label.</p>

Product Usage Chart

	LVT	Linoleum	Rubber
Cleaners	LVT-Clean	Enhance	Flexi-Clean
Scrub / Floor Prep	Surface Prep	Surface Prep	Surface Prep
Coating - Gloss	Next Century	Next Century	Flexi-Sheen
Coating - Matte	LVT-Protect		



World Class Cleaning & Hygiene Solutions®

401 N. 10th Street • Philadelphia, PA 19123
 www.nclonline.com • e-mail: info@nclonline.com
 1-800-628-2436

Distributed By: